UIAPduino

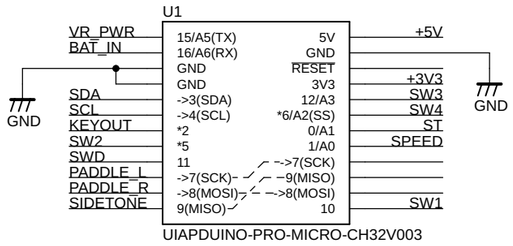

Switch

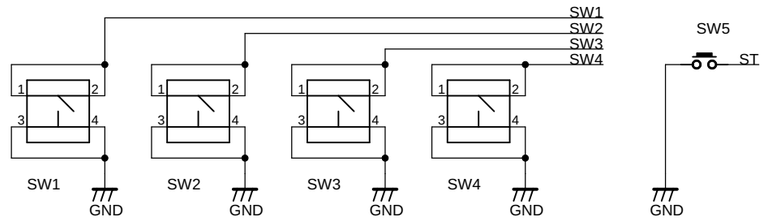

Paddle Input



Straight Input



C1, R4, R5 is optional for receiver input

Key Output

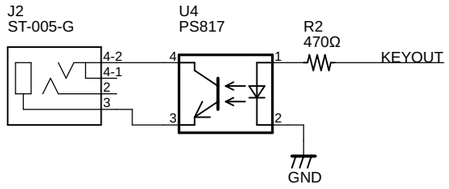

Power Management

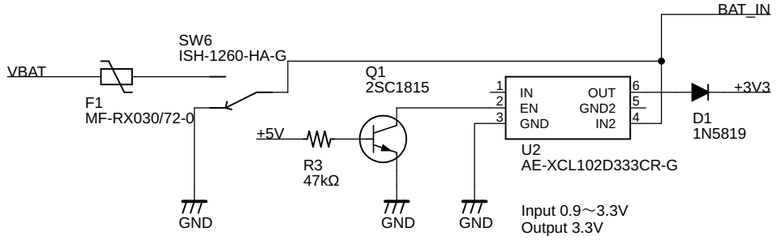

When EN is Low, U2 is disabled

Speaker



Speed Volume



OLED (I2C)



Debug



Battery Connect



TITLE: KEYER DS (UIAPduino) V3 v16	
Document Number:	REV:
Date: 2026/08/22 23:22	Sheet: 1/1